

Loyal Universal Roof Hooks for Ladders


Safety

Please refer to original ladder manufacturer's manual for safety advice regarding ladder use.

- Keep the equipment in good condition.
- Replace or repair damaged parts. Use genuine parts only.
- **WARNING!** Never overreach when using the ladder roof hook.
- **DO NOT** use the roof hook for any purpose other than that for which it is intended for.
- **WARNING!** Ensure the hooks are securely placed over the apex of the roof before placing any weight on the ladder.

Before assembly ensure the pack contains:

1. x2 Roof Hook Bars with wheels connected
2. x4 J Bolts
3. x2 Adjustable Brackets
4. x4 Washers
5. x4 Red Wing Nuts

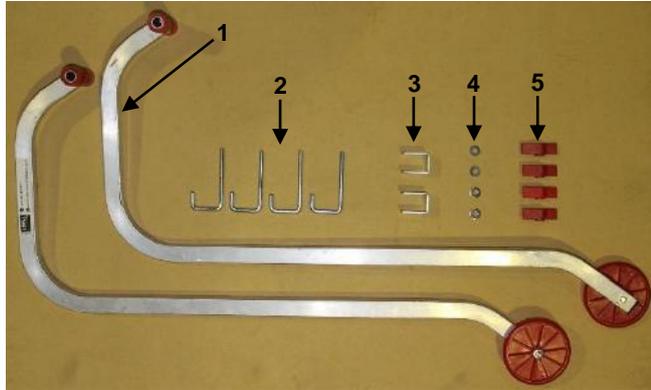

Assembly & Use:

- Place the hooks onto the ladder with the wheels facing outwards, insert one of the J bolts around the second last tread and into the box section, secure with a washer and wing nut.
- Take the other J bolt and put it around the upper tread, through the adjustable bracket and secure with a washer and wing nut.
- Repeat with the other roof hook. Position the other hook on the opposite side of the ladder.
- Push the ladder up the roof on the wheels, at the ridge turn the ladder over and ensure that the T-section on the hooks rest even and not on the ridge tile but on the other side of the roof.



Fully assembled & ready to use



Maintenance

- Periodically check that all nuts are tight and secure but DO NOT over tighten.
- Check that the rubber feet on the T-section are in good condition and are not worn, replace if necessary.



Aluminium Scaffold Towers Ltd.

☎ 01353 778811

✉ sales@aluminium-scaffoldtowers.co.uk

🌐 www.aluminium-scaffoldtowers.co.uk